

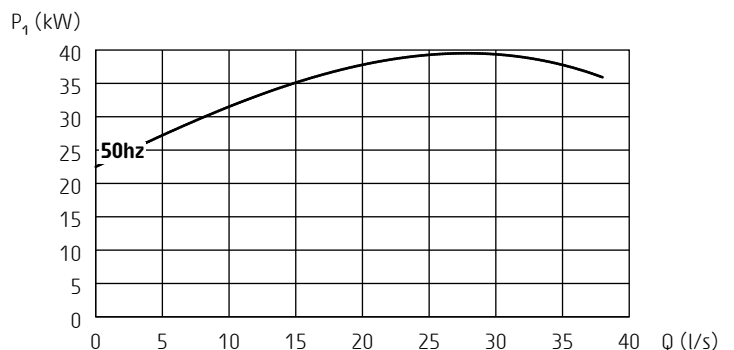


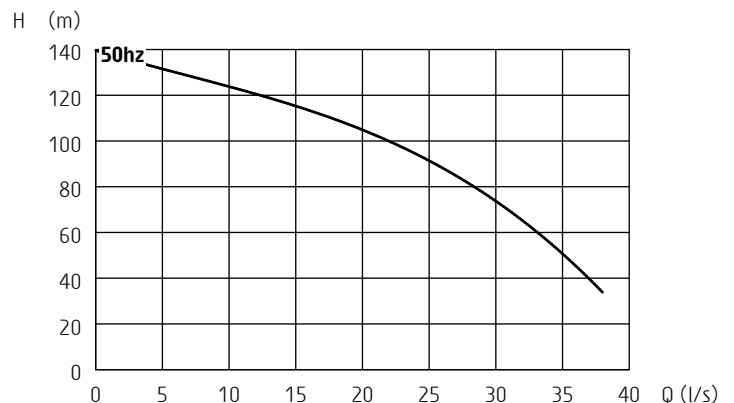

Maxi SH

Electrical submersible drainage pump

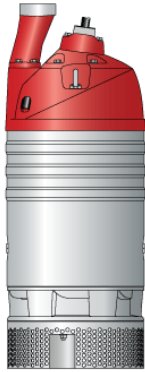

50 Hz	SH
Discharge connection	4"
Rated power P ₂ [kW]	37
Max. power consumption P ₁ [kW]	41
Shaft speed [r.p.m.]	2945
Rated current at 230V	112
Rated current at 400V	65
Rated current at 500V	51
Rated current at 1000V	26
Solids passage [mm]	12
Height [mm]	1148
Width [mm]	440
Weight [kg]	270

Other voltages on request

Pump types

SH: Super high pressure

Classification

Electrical submersible pump, protection class: IP68

Electrical motor

Squirrel cage induction motor, insulation class H (IEC 85)

Motor protector

Temperature guard with thermal contacts in the stator and air valve

This pump must be used with external motor protection in accordance with technical data

Cable - SubCab

230V DOL: 1x 4G35mm²+S(2x0,5)mm², 20m

230V Y/D: 2x 4G25mm²+S(2x0,5)mm², 20m

400-500V DOL: 1x 4G16mm²+S(2x0,5)mm², 20m

400-500V Y/D: 2x 4G10mm²+S(2x0,5)mm², 20m

Limitations

Max. submersion depth: 20 m

Max. liquid temperature: 40 °C

Allowed pH range: 5 - 8

Maximum liquid density: 1100 kg/m³

Shaft seals

Double mechanical seal running in an oil compartment
Material lower seal: tungsten carbide - tungsten carbide
Material upper seal: tungsten carbide - tungsten carbide

Bearings

Lower: Double angular contact ball bearing with CB clearance

Upper: ball bearing with C3 clearance

Discharge connection

Hose: 4"

NPT & ISO-G Male: 4"

Materials

Casted parts: Aluminium

Outer casing: Stainless steel

Motor shaft: Stainless steel

Impeller: Hard-Iron™

Diffusers: Polyurethane

Screws and nuts: Stainless steel

Accessories

Zinc anodes - Starter box, DOL or Y/D

Tandem connection - Pump raff - Non return valve

ISO 9906/A