

SOUND-ATTENUATED DIESEL-DRIVEN PACKAGES




Please, scan the QR code to our website


# 100SH

## PUMP MODEL PP64S17 PIONEER PRIME VACUUM ASSISTED DIESEL-DRIVEN PACKAGE SOUND ATTENUATED CANOPY PACKAGE

### MECHANICAL DRAWING

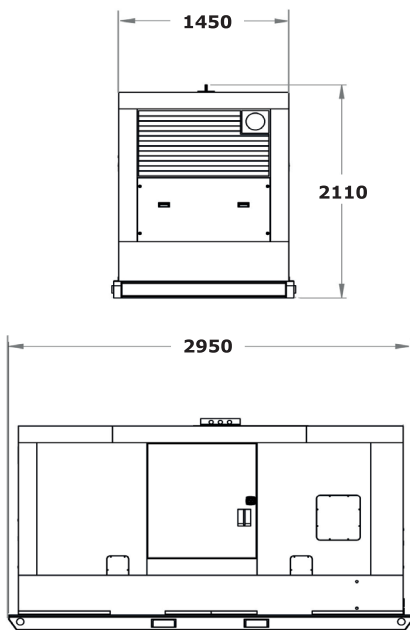

### PERFORMANCE CURVE

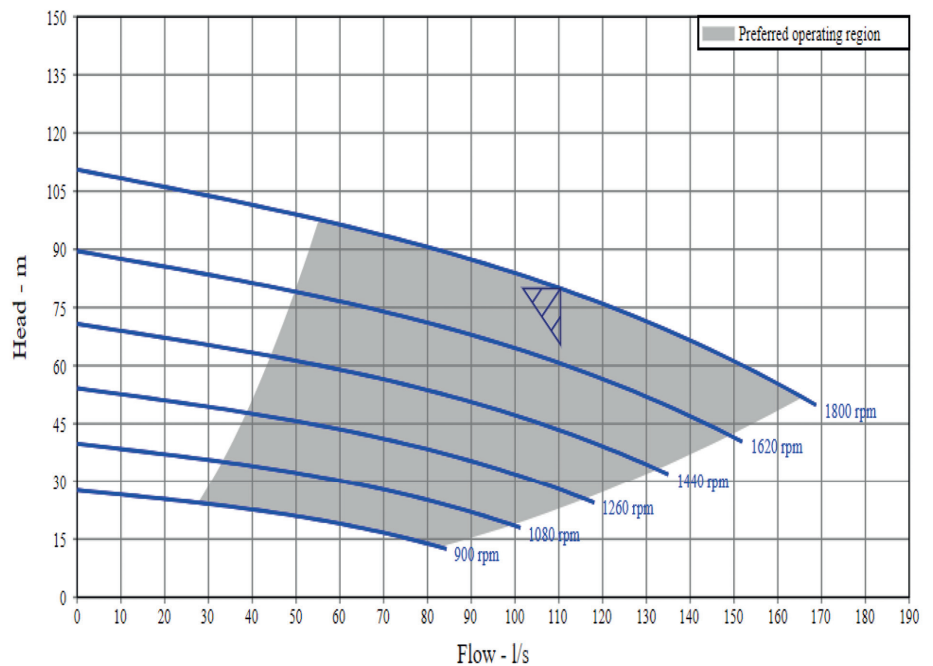

**WEIGHT FULLY FUELED:**  
3530 KG

**MODEL:** PP64S17  
**IMPELLER DIAMETER:** 432 mm | **SOLIDS SIZE:** 76 mm

## SOUND-ATTENUATED DIESEL-DRIVEN PACKAGES

# PUMP MODEL PP64S17

## PIONEER PRIME VACUUM ASSISTED DIESEL-DRIVEN PACKAGE SOUND ATTENUATED CANOPY PACKAGE



### SPECIFICATIONS

Suction Connection	150 mm
Delivery Connection	100 mm
Max Flow	720 m <sup>3</sup> /h
Max Head	150 m
Solids Size	76 mm
Max Speed	1700 rpm
Rated Power BEP	100 kW
Fuel Tank Size	695 l
Sound Raiting	64 dB 7 metres
L x W x H (mm)	2950 x 1450 x 2110

### PIONEER PRIME SYSTEM

#### Priming System

Mechanically Driven Diaphragm Style Vacuum Pump

#### Air Removal Capacity

50CFM

#### Priming Chamber

Single chamber with positive sealing air separation

PosiValve™ with stainless steel float ball & linkage.

#### Discharge Check Valve

Swing Style - ductile iron with Buna-n Disc completely drywithout damage

### FEATURES

- Indefinite Run-Dry Capability
- Efficient Design for Reduced Operating Costs
- Auto Stop/Start w/telemetry and remote monitoring
- Sound Attenuated, Fully Bunded Packages
- Spark Arresting Mufflers
- Chalwyn Valve
- Environmentally Safe Priming System with Patented PosiValve™ – No Blow By

### ENGINE SPECIFICATIONS

Engine Type	JBC
Displacement	4,4 litres
Max Continuous Horsepower	129 kW
Safety Shutdown Switches	Low Oil Pressure, High Temperature, and V-Belt Failure

### APPLICATIONS

Raw Water Pumps	Cooling Pumps	Sewage Bypass	Mine Dewatering
Dirty Water	Flood Pumps	Flushing	

### OTHER SPECIFICATIONS

Mechanical Seal	Single seal w/ tungsten carbide vs. silicon carbide seal faces, Viton® elastomers, 300 series stainless steel hardware and spring, designed for indefinite dry running
Pump End Bearing	Enclosed Type Impeller – CA6NM Stainless Steel
Drive End Bearing	Double Row Angular Contact
Shaft	17-4 PH Stainless Steel
SAE	SAE engine-mount bracket options available

### CONSTRUCTION MATERIALS

#### STANDARD

#### OPTION

Impeller	CA6NM-316 SS	CD4MCu
Volute	Ductile Iron ASTM A536 65-45-12	CD4MCu
Wear Ring	CD4MCu-316 SS	CD4MCu-316 SS
Suction Cover	Ductile Iron ASTM A536 65-45-12	CD4MCu
Bracket	Ductile Iron ASTM A536 65-45-12	CD4MCu
Backplate	Ductile Iron ASTM A536 65-45-12	CD4MCu

### RH PUMPER A/S

Stenrøjlervej 1  
DK-4200 Slagelse

Telefon: +45 5850 6065 | E-mail: info@rhpumper.com

RHPUMPER.COM



HEAVY DUTY PUMPS

ISO 14001, ISO 45001 og Sellihca Qualified