

# ELECTRIC TRANSPORTABLE SELF-PRIMING PUMP




Please, scan the QR code to our website




## 150 MM PX3 28 KW PRIME VACUUM ASSISTED ELECTRIC DRIVEN PACKAGE TRANSPORTABLE CANOPY PACKAGE

### MECHANICAL DRAWING

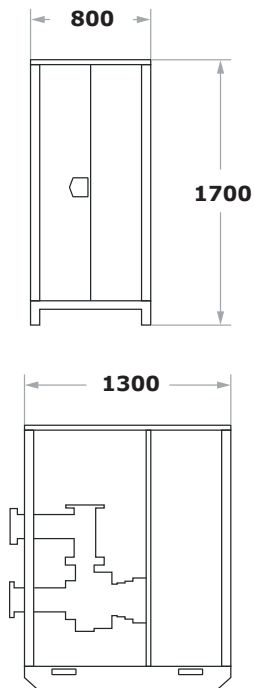

**WEIGHT:**  
980 KG

### PERFORMANCE CURVE

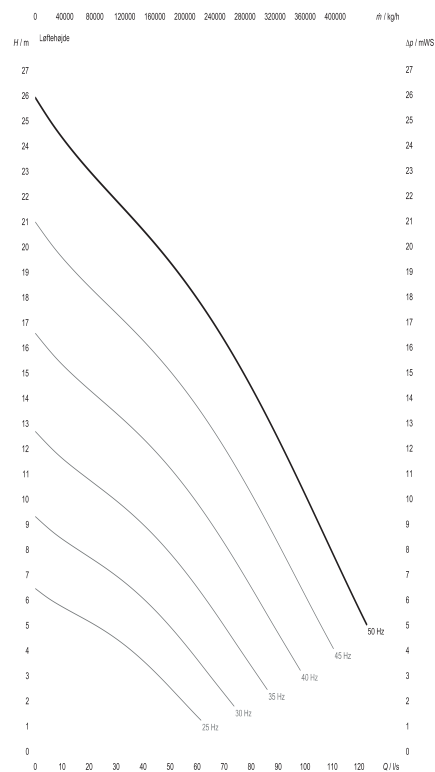

# ELECTRIC TRANSPORTABLE SELF-PRIMING PUMP

## 150 MM | PX3 28 KW

**PRIME VACUUM ASSISTED  
ELECTRIC DRIVEN PACKAGE  
TRANSPORTABLE CANOPY PACKAGE**



### SPECIFICATIONS

Suction Connection	150 mm
Delivery Connection	150 mm
Max Flow	440 m <sup>3</sup> /h
Max Head	26 m
Solids Size	100 mm
Max Speed	1462 rpm
Rated Power BEP	28 kW
Sound Rating	65 dB 7 metres
L x W x H (mm)	1300 x 800 x 1700

### PRIME SYSTEM

#### Priming System

Mechanically Driven Vacuum Pump

#### Air Removal Capacity

50CFM

#### Priming Chamber

Single chamber with positive sealing air separation  
PosiValve™ with stainless steel float ball & linkage.

#### Discharge Check Valve

Swing Style - ductile iron with Buna-n Disc completely  
drywithout damage

### FEATURES

- Indefinite Run-Dry Capability
- Efficient Design for Reduced Operating Costs
- Auto Stop/Start with Floats/ pressure transmitter
- Pump controller with Sim card for SRO monitoring
- Environmentally Safe Priming System with Patented PosiValve™ - No Blow By
- VFD controller

### MOTOR SPECIFICATIONS

Cos Phi 0,795  
28 kW 400V 58A

High Efficient Electrical motor  
Safety Shutdown Switches High Temperature

### APPLICATIONS

Raw Water Pumps	Flood Pumps	Mine Dewatering
Dirty Water	Sewage Bypass	Flushing
Cooling Pumps	Bypass	Process water

### OTHER SPECIFICATIONS

- Channel or vortex Impeller
- Fully welded and galvanized Frame
- Fork lifting pockets
- Oversized stainless steel shaft AISI 420
- Individual setup
- Large solids handling capability
- Run dry double tandem mechanical seal
- Large solids handling capability
- Connections Bauer and parrot
- Auto Start/stop control panel with VLT inverter
- Lifting pockets
- Lifting eyes on top
- Ductile iron GS500 impeller
- Telemetry monitoring
- 24/7 live data

### CONSTRUCTION MATERIALS

#### STANDARD

#### OPTION

Impeller	Ductile	Stainless steel/duplex
Volute	Ductile Iron	Stainless steel/duplex
Wear Ring	CD4MCu-316 SS	CD4MCu-316 SS
Suction Cover	Ductile Iron	Stainless steel/duplex
Bracket	Ductile Iron	Stainless steel/duplex
Backplate	Ductile Iron	Stainless steel/duplex

### RH PUMPER A/S

Stenrøjlervej 1  
DK-4200 Slagelse

Telefon: +45 5850 6065 | E-mail: info@rhpumper.com

[RHPUMPER.COM](http://RHPUMPER.COM)



**HEAVY DUTY PUMPS**

ISO 14001, ISO 45001 og Sellihca Qualified